

Viewsonic LDS135-151 Signage Display Digital signage flat panel 3.43 m (135") Wi-Fi 600 cd/m² Full HD Black Android 9.0


Brand : Viewsonic

Product code: LDS135-151

Product name : LDS135-151

- Pre-assembled kit ready for instant use
- Foldable screen with the movable flight case for easy delivery
- Built-in stand with motorised height adjustment
- Impressive audio from Harman Kardon speakers
- Seamless large display for rental at any event/exhibition

Foldable 135" All-in-One LED Display, 1920x1080, 6000:1, VGA, 100-120V, IP30, Android 9.0, VGA
Viewsonic LDS135-151. Product design: Digital signage flat panel. Display diagonal: 3.43 m (135"),
Display resolution: 1920 x 1080 pixels, Display brightness: 600 cd/m², HD type: Full HD. Wi-Fi. Operating
system installed: Android 9.0. Product colour: Black

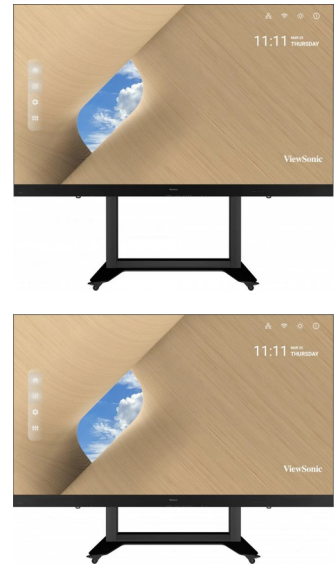

Display		Design	
LED backlight	✓	Product design *	Digital signage flat panel
LED backlighting type	Direct-LED	Placement supported *	Indoor
Display diagonal *	3.43 m (135")	Product colour *	Black
Display resolution *	1920 x 1080 pixels	VESA mounting *	✓
Display brightness *	600 cd/m ²		
HD type *	Full HD		
Viewing angle, horizontal	160°		
Viewing angle, vertical	160°		
Pixel pitch	1.56 x 1.56 mm		
Panel life	100000 h		
Horizontal scan range	20 - 120 kHz		
Vertical scan range	15 - 135 Hz		
Ports & interfaces		Performance	
HDMI ports quantity *	6	Purpose *	Universal
HDMI version	2.0		
VGA (D-Sub) input ports	1		
USB port *	✓		
USB version	2.0		
Ethernet LAN *	✓		
Ethernet LAN (RJ-45) ports	1		
Wi-Fi *	✓		
RS-232 interface	✓		
Remote (IR) input	1		
Audio		Power	
Built-in speaker(s) *	✓	Power consumption (typical) *	1200 W
Number of built-in speakers	2	Power consumption (standby) *	0.5 W
RMS rated power	20 W	Power consumption (max)	2300 W
		AC input voltage	100-240 V
		AC input frequency	50-60 Hz
		Computer system	
		Operating system installed	Android 9.0
		Operating system version	Android 9.0
		Weight & dimensions	
		Display width	1800 mm
		Display depth	770 mm
		Display height	1948 mm
		Display weight	253 kg
		Width (with stand)	1900 mm
		Depth (with stand)	800 mm
		Height (with stand)	2032 mm
		Weight (with stand)	453 kg
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C



0766907014921



766907014921

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.